

	Product	Description	Info	Info	Application	Elasticity	Elonga- tion %	Curing	Filling capability	Tensile strength (Mpa)	Hardness (shore)
SEALING	 AC38	Acrylic decorators caulk	Can be used indoors and outdoors Easy to wipe off	Paintable: 60 minutes	Sealing	Elastic	200			0,68	30A
	 AC80	Repair of cement joints	For indoor and outdoor use Stronger than cement joints	Rainproof: 2-4 hours	Filling	Rigid					80A
	 B1 FOAM	Professional insulation and mounting foam	Controlled expansion without post-expansion High thermal and acoustic insulation	Applicable down to -10°C	Bonding & sealing	Plastic		30 min.	10 cm		
	 S&B EASY SEAL	Permanently flexible rubber sealing paste	Immediately wind- and waterproof Removable on non-porous substrates	Temperature up to +100°C	Bonding & sealing	Elastic			2 cm		
	 S&B MS22 X	High-quality sealant	Qualicoat seaside certified Food approved	Applicable down to -10°C	Sealing	Elastic	600	3 mm/24 h	3 mm	1,4	22A
	 S&B MS40 ALU	Transparent sealing with chameleon effect	Ideal for colour transitions Contains no silicones or isocyanates	Stick-free: 40 minutes	Sealing	Elastic	250	4 mm/24 h	3 mm	2,2	40A
	 S&B MS40 TRANS	Crystal-clear sealant and adhesive	Ideal for all interior applications Contains no silicones or isocyanates	Stick-free: 40 minutes	Sealing	Elastic	250	4 mm/24 h	3 mm	2,2	40A
	 S&B SEALTRANS	Flexible sealing and finishing sealant	Qualicoat seaside certified Safe on PCB films and rubbers	Elongation at break: 900%	Sealing	Highly elastic	900	3 mm/24 h	3 mm	1,4	24A
	 S&B SIL25	Highly resistant sealant	Highly UV, chemical and temperature resistant Safe on natural stone, mirrors, ...	Temperature up to +150°C	Sealing	Highly elastic	700	2 mm/24 h	3 mm	1,3	25A
CYANOACRYLATES	 TIRE SEALANT	Sealing of punctures between tyre and rim	Adheres to the tyre, not the rim Also on damaged or oxidised rims	Drying: 5 minutes	Sealing	Elastic		5 min.	1 mm		
	 AFX-150 AL-FIX 2K	High-filling 2K CA adhesive	Filling capacity up to 5 mm Also for vertical use	Curing: 2-3 minutes	Bonding	Rigid		3 min.	5 mm	15	56D
	 AL-FIX	Transparent CA adhesive	Super strong in thin layers Adhesion is stronger with thin film thickness	Curing: 5-10 seconds	Bonding	Rigid		10 sec.	0,1 mm	20	
	 AL-FIX BLACK	Black flexible CA adhesive	Moisture-resistant CA adhesive Moisture, shock and impact resistant	Curing: 60-120 seconds	Bonding	Elastic		90 sec.	0,2 mm	6	
	 AL-FIX FILLER	Filler for CA adhesives	Thick layer build-up with AL-FIX Direct fill and repair		Filling	Rigid			10 mm		
	 AL-FIX FLEXIBLE	Transparent flexible CA adhesive	Shock-resistant fast adhesive Excellent chemical resistance	Curing: 30-60 seconds	Bonding	Elastic		15 sec.	1 mm	20	
CHEMICAL ANCHOR	 AL-FIX GEL	Filling transparent CA adhesive	Filling adhesive up to 3 mm Direct curing with Al-Fix Aktivator (SF)	Curing: 30-60 seconds	Bonding	Elastic		20 sec.	1 mm	15	
	 Q-FIX 120	Strong and fast chemical anchoring	Wet drill holes / Cracked concrete ETA up to M30 / Ø 32 mm MATERIAL (Q-Fix): threaded rod max M30 Concrete steel max Ø 32 mm SUBSTRATE (Q-Fix): Cracked and uncracked concrete strength class C20/25 to C50/60 ETA CONDITIONS (Q-Fix): All environments, incl. heavy soiling, aggressive chemicals and seawater. Wet and flooded drilling holes. All drilling types.	Temperature up to +120°C	Anchor	Rigid		See ETA		See ETA	




Industrielaan 5B
2250 Olen - Belgium
32 14 25 76 40
info@novatio.be

Novatio is a registered trademark of
Novatech International NV



We make making things better

Seal & Bond Chart

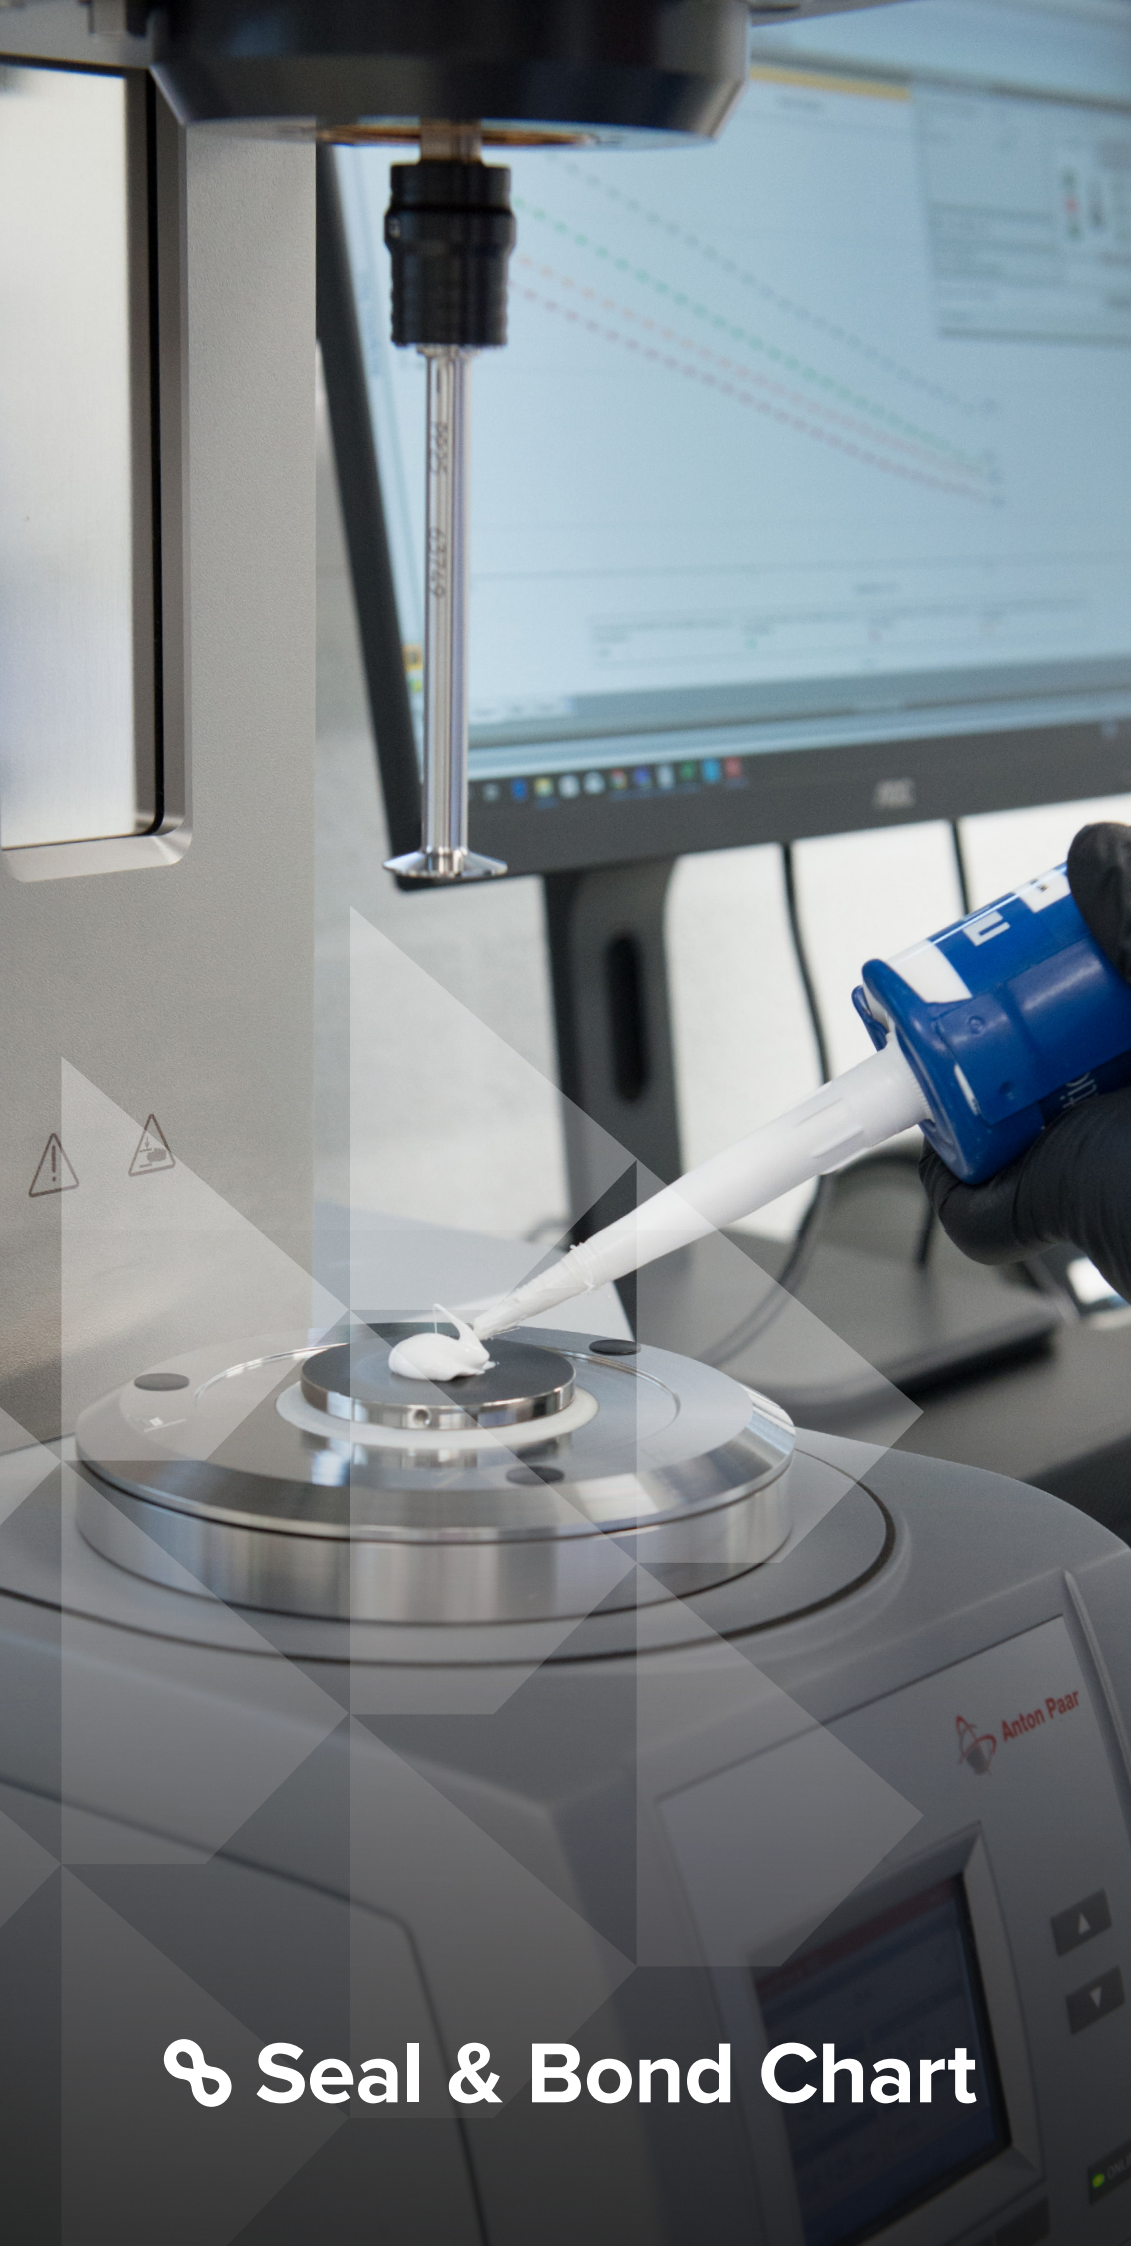

	Product	Description	Info	Info	Application	Elasticity	Elonga- tion %	Curing	Filling capability	Tensile strength (Mpa)	Hardness (shore)		Product	Description	Info	Info	Application	Elasticity	Elonga- tion %	Curing	Filling capability	Tensile strength (Mpa)	Hardness (shore)
🔪 1K ADHESIVES	 FCP-110 FP CONSTRUCT	1K MS hybrid polymer adhesive	1K corner bonding of aluminium profiles Contains no isocyanates or solvents	Functional strength: 3 hours	Bonding	Elastic	200	3 h	5 mm	2			 DUOFIX	Transparent 2K epoxy adhesive	Strong, rigid bonding High adhesion strength	Functional strength 30 minutes	Bonding	Rigide		15 min.	2 mm	40	65D
	 MSF-1145 MS FASTBOND 1K	1K hybrid polymer mounting adhesive	High-strength elastic bonding Low-tension bonding	Functional strength: 6 hours	Bonding	Elastic	310	6 h	5 mm	4,3	45A		 EPC-140 EP CONSTRUCT 2K	Impact-resistant 2K epoxy adhesive	2K corner bonding of aluminium profiles Extreme adhesion	Open working time: 4 hours	Bonding	Plastic		8 u	2 cm	17	75D
	 PU 22	1K PU adhesive	Gluing, filling and sealing High thermal and acoustic insulation	Functional strength: 60 minutes	Bonding & sealing	Plastic		60 min.	5 cm	0,4			 FCP-111 FP CONSTRUCT 2K	2K MS hybrid polymer adhesive	2K corner bonding of aluminium profiles Assured curing, even in thick layers	Functional strength: 60 minutes	Bonding	Elastic	500	60 min.	2 cm	2,1	
	 PU CONSTRUCT	Light foaming 1K PU adhesive	High adhesion strength Impact and vibration resistant	Functional strength: 30-60 minutes	Bonding	Plastic		60 min.	1 cm	12			 MEGAPLAST MM	Structural MMA adhesive	Extreme tensile forces Metal and plastic bonding	Workable: 30 minutes	Bonding	Plastic	30	30 min.	5 mm	60	
	 S&B MS CONSTRUCT	High-quality mounting kit	Extreme initial adhesion Safe on natural stone, mirrors, ...	Functional strength: 6 hours	Bonding	Elastic	500	2,5 mm/24 h	1 cm	2,2	60A		 MEGAPLAST PPE	Fast setting 2K adhesive for difficult plastics	Bonding Polypropylene (PP), polythene (PE) Strong, impact-resistant bonding	Functional strength: 20 minutes	Bonding	Plastic	5	2 u	2 mm	13	50D
	 S&B MS SCREEN	Hybrid windshield adhesive	Safe and secure windshield adhesive No isocyanate certificate required	Drive-Away Time: 120 minutes	Bonding	Elastic	450	Drive-away 2 h	1 cm	2,3	50 A		 MEGAPLAST PU 25S	Powerful instant 2K PU adhesive	High filling power High tensile and adhesive strength	Workable: 5 minutes	Bonding	Plastic	72	4 min.	5 mm	26	
	 S&B MS SCREEN +	Fast hybrid windshield adhesive	Safe and secure windshield adhesive No isocyanate certificate required	Drive-Away Time: 60 minutes	Bonding	Elastic	450	Drive-away 1 h	1 cm	2,3	50 A		 MEGAPLAST PU 90S	Powerful fast 2K PU adhesive	High filling power High tensile and adhesive strength	Workable: 10 minutes	Bonding	Plastic	72	10 min.	5 mm	26	
	 S&B MS60	Bonding, mounting and sealing	High bonding strength and elasticity Food approved	Functional strength: 3-6 hours	Bonding & sealing	Elastic	350	6 mm/24 h	3 mm	3,8	60A		 MSU-1136 MS ULTRA FASTBOND 2K	2K hybrid polymer assembly adhesive	Fast elastic bonding and sealing Curing to the core, even in thick layers	Functional strength: 30 minutes	Bonding	Elastic	500	60 min.	2 cm	2,1	
	 S&B MS62 X	High-tech construction adhesive	High initial tack Food approved	Applicable from -10°C	Bonding	Elastic	350	3 mm/24 h	1 cm	2,2	62A		 NOVA POWER GRIP 401	Powerful instant 2K PU adhesive	Bonding and repairing plastic and metal Shrink-free curing	Functional strength: 10 minutes	Bonding	Plastic	70	10 min.	2 cm	26	
	 S&B SPRAY	Sprayable hybrid polymer	Resistant coating or full-surface bonding Sprayable with Mastergun	Curing: 12-24 hours	Bonding & sealing	Elastic	450	3 mm/24 h	3 mm	1,5	45A		 NOVA POWER GRIP 403	Powerful fast 2K PU adhesive	Bonding and repairing plastic and metal Shrink-free curing	Functional strength: 30 minutes	Bonding	Plastic	70	30 min.	2 cm	26	
	 SILFIX	Transparent CA adhesive for difficult materials	Glues neoprene, PE, PP, silicones, ... Primer + adhesive = simple system	Curing: 1-5 seconds	Bonding	Highly elastic		5 sec.	0,1 mm	25			 NOVA POWER GRIP 409	High-performance 2K PU adhesive with long open time	Bonding and repairing plastic and metal Shrink-free curing	Functional strength: 60 minutes	Bonding	Plastic	70	60 min.	2 cm	26	
	 TRANSFIX	Transparent adhesive with 700% elasticity	Strong adhesion to flexible materials Good adhesion to polypropylene	Functional strength: 4-8 hours	Bonding	Highly elastic	700	8 h	1 mm	21	80A		 NOVA TITAN STICK	2K titanium-filled epoxy stick	Heat-resistant repair paste Temperature: -35°C to +280°C	Workable: 60 minutes	Filling	Rigide		1 u	15 mm	6,5	65D
	 TRIMFIX	Universal spray adhesive	Thin adhesive layer Immediate high adhesion strength	2 m² per aerosol	Bonding	Elastic		5 min.	0,1 mm				 NOVA WET STICK	2K ceramic-filled epoxy stick	Moisture-resistant repair paste Temperature: -50°C to +120°C	Workable: 60 minutes	Filling	Rigide		4 u	15 mm	7,5	80D
	 TRIMFIX WT	Threaded spray adhesive for rough materials	Web structure for even adhesive contact Adjustable spray pattern	3-6 m² per aerosol	Bonding	Elastic		3 min.	0,5 mm				 NPG-1370 NOVA POWER GRIP 2K ME	Low-impact, low-isocyanate construction adhesive	Bonding and repairing plastic and metal No isocyanate certificate required	Functional strength: 30 minutes	Bonding	Plastic	58	30 min.	2 cm	26	70D
🔪 SECURING / GASKET	 NOVALOK M	Anaerobic adhesive for strong securing	Removable locking device Applicable up to M36	Curing: 15-30 minutes	Thread locker	Rigid		15 min.	0,5 mm	8,5			 S&B MS50 2-K	Fast 2K hybrid assembly adhesive and sealant	Fast bonding of complex applications Curing to the core, even in thick layers	Functional strength: 2-3 hours	Bonding	Elastic	600	3 u	2 cm	2,1	50A
	 NOVALOK SF	Anaerobic adhesive for structural securing	Permanent locking Suitable up to M36	Curing: 1-3 minutes	Thread locker	Rigid		3 min.	0,5 mm	20			 ACO-210 ANTICORRO	Anticorro for aluminium mitres	Qualicoat seaside certified Good workability	Open working time: 30-60 minutes	Sealing	Elastic	350			1,5	
	 SBF-220 LIQUID SEAL	Oil-resistant liquid gasket	Fast application with presspack Long-lasting, secure seal	Temperature up to +300°C	Sealing	Highly elastic	290	6 h	2 mm				 CARSEAL SPRAY	Sprayable elastic underbody coating	Solvent- and isocyanate-free Sprayable with Mastergun	Curing: 12-24 hours	Coating	Elastic	450	3 mm/24 h	3 mm	1,5	45A
	 S&B FLEX-SIL	Liquid gasket	Resistant to chemicals and high pressure Highly elastic & stable	Maximum temperature: +300°C	Sealing	Highly elastic		6 h	2 mm		38		 NOVAROOF	Fibre-reinforced bituminous sealing paste	Cold adhesive and repair paste Also on wet surfaces	Applicable down to -12°C	Sealing	Elastic	170	/	1 cm		
													 NSP-2700 NOVAQUASPRAY	Polyvalent protection and sealing	Protects against moisture and corrosion Waterproof after 20 minutes	Paintable: 90 minutes	Coating	Elastic		90 min.	2 mm		