


# Novatex Tape

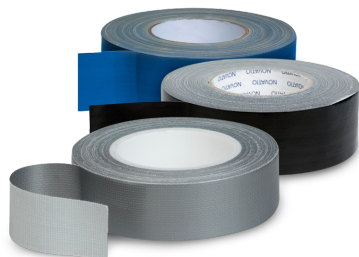

QUALITY TAPE FOR UNIVERSAL MAINTENANCE AND REPAIR

- ✓ Very high adhesion on most surfaces.
- ✓ Easy to tear, also in the length.
- ✓ Temperature and water resistant.

## Technical Info

- Thickness of tape: 0.279 mm.
- Tensile strength: 112 N/25 mm.
- Elongation at break: 9%.
- Adhesion to stainless steel: 16 N/25 mm.
- Temperature resistance: normal: -10°C up to 80°C; +95°C for 30 minutes.
- Material of tape: polyester-cotton cloth laminated to a PE backing.
- Adhesive: high tack - natural rubber based.
- Resistance to seawater: only occasional contact.
- First test foundations based on PE, PP, silicones and bitumen for adhesion.
- Shelf life: 36 months, keep dry, cool and frost-proof.

## Packing

Novatex Tape black - roll 19mm / 10m	561017000
Novatex Tape black - roll 50mm / 50m	561018000
Novatex Tape grey - roll 50mm / 50m	561028000
Novatex Tape blue - roll 50mm / 50m	561048000

## Product [NTX]

### Characteristics

- A woven cloth tape, provided with a polyethylene protection and a strong adhesive coating.
- Easy to tear, also lengthwise.

### Applications

- sealing air ducts and funnels
- bundling cables
- repairing tarpaulins
- keeping objects in place while bonding
- temporary fixings - stand buildings
- sealing airconditioning ducts
- repairing exhaust tubes
- fixing plastic foil for storage
- temporary sealing of window and door openings
- temporary repair of broken windows
- protecting sharp edges and corners
- essential in every company car