

MASTERGUN


How to use



THE MASTERGUN CAN HANDLE ALL KINDS OF SINGLE-COMPONENT PRODUCTS IN 310 ML PACKAGING.


Description of the parts:

1. Compressed air gun - maximum working pressure = 8 bar.
2. Nylon piston for sprayable products in bag.
3. Adapter for products in bag.
4. Adapter for non-sprayable metal or plastic packaging.
5. External nozzle for a large grain structure (e.g. Volkswagen).
6. External nozzle for a fine grain structure (e.g. Renault).
7. Internal nozzle for screwing onto the cartridge.
8. Pneumatic regulator for quantity of product.
9. Pneumatic regulator for pressure on nozzle - only to be used for sprayable products.
10. Lever.
11. Tightening nut.

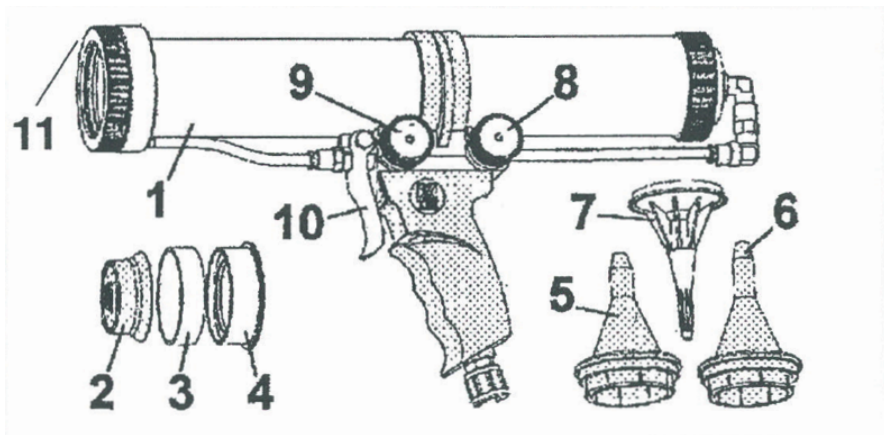

HOW TO USE CARSEAL-SPRAY WITH THE MASTERGUN.

- Cut open the Carseal-Spray cartridge at the front and attach the internal nozzle (7).
- Slide the external nozzle (5) or (6) over the internal nozzle (7).
- Place the cartridge in the gun (1) and attach tightening nut (11).

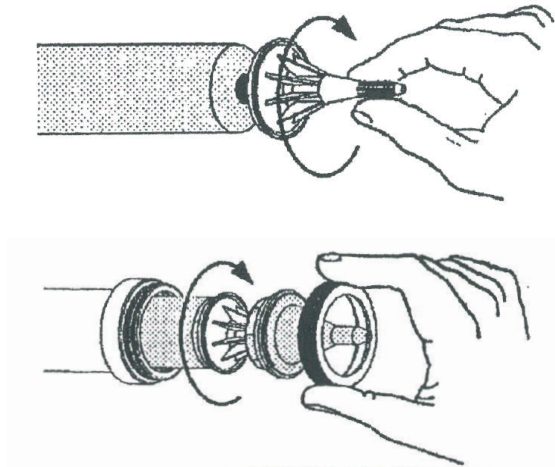


- Connect the MASTERGUN to the compressed air line - maximum working pressure 5 bar.
- Open the front pneumatic regulator (9) completely.
- Open the lever (10).
- Open the rear pressure regulator slowly (8).

!!! ATTENTION: If the gun is connected to a line with working pressure higher than 5 bar, the regulator (8) may NEVER be higher than position '5'.

- Now regulate following factors in order to obtain the desired structural effect :
 1. front air regulation (9)
 2. product quantity (8)
 3. spraying distance
- When ending the spray flow, it is recommended to release the lever (10) very slowly. In the front position of the lever, air will only be supplied in the front, and consequently the nozzles will be cleaned automatically.
- After use, spray through the nozzle with the product inlet (8) completely closed. Leave the internal nozzle on the cartridge. Cured product residue can be easily removed in the form of a ball.

HOW TO USE CARSEAL SPRAY OR OTHER PRODUCTS IN PLASTIC OR ALUMINIUM 310 ML CARTRIDGES WITH THE MASTERGUN.


- Open the cartridge following the manufacturer's instructions.
- Fix and cut off the nozzle provided with the cartridge.
- Push the cartridge into the MASTERGUN (1). Fix the adapter and screw on the tightening nut (11).

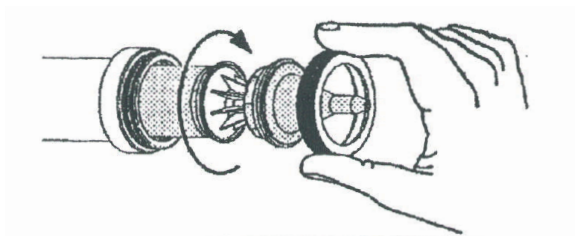

- Connect the MASTERGUN (1) to the compressed air line - maximum working pressure 8 bar.
- Leave the front air regulation (9) closed and slowly open the rear regulator (8). Open the plunger (1) and adjust the desired product quantity with regulator (8).

HOW TO USE PRODUCTS IN 310 ML BAGS WITH THE MASTERGUN


- Remove the tightening nut (11). Connect the MASTERGUN to the compressed air line (maximum working pressure 8 bar) and make sure that regulator (8) and (9) are closed. Open lever (10) and then slowly open the pressure regulator (8) until the piston comes into front position, then release lever (10).

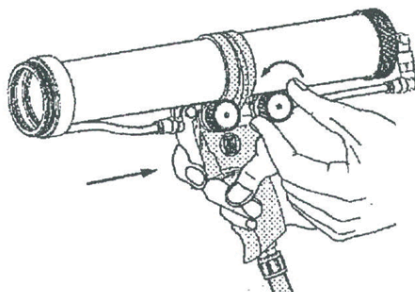

- Using a screwdriver, screw on the nylon piston (3) and push back the piston slowly.



- Fit the adapter (3) or (4) according to the type of nozzle. Adapter (4) can for this purpose be moved upside-down.

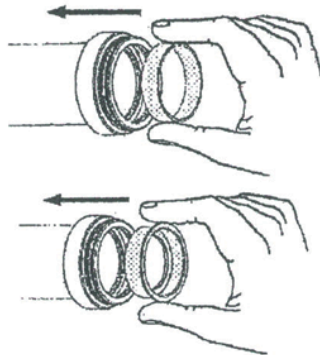

- Open the bag and assemble the nozzle following the manufacturer's instructions. Cut off the nozzle at the desired length. Push the bag into the MASTERGUN (1) and fix tightening nut (11).
- Leave the front air regulator (9) closed and open rear regulator (8) slowly. Open the lever (10) and adjust the exact product quantity with regulator (8).



 **novatio**

Novatio | Industrielaan 5B | 2250 Olen
T +32 14 25 76 40 | F +32 14 22 02 66
info@novatio.com | www.novatio.com

member of **novatech** INTERNATIONAL
