

Seal & Bond Special Primer

BONDING PRIMER FOR DIFFICULT MATERIALS

- Ideal for PP, PE, ABS, powder coatings, painted surfaces, ...
- Can be used for glue, tapes and coatings.
- Transparent and invisible after rapid drying.

Technical Info

- Color: transparent.
- Base: polyolefin.
- Consumption: +/-2-3 m² per 400 ml, +/-1-1/2 m² per 150 ml.
- Drying time: +/-10 min.
- VOC value: 276,4g/L.
- Surfaces: PP, PP/EPDM, ABS, SAN PC, PA, PUR-RIM, R-TRU, PPO, PBT, PUR flexible foam, UP-GF Plastics, powder coatings, painted surfaces...
- Storage life: 36 months with a temperature of 10°C. up to 25°C and a max. humidity degree of 60%.
- Safety measurements: please consult the safety data sheets. Seal & Bond Special Primer is 100% free of heavy metals.
- The aerosols are made of recycled materials and only contain a CFCfree propellant.

Packing

Seal & Bond Special Primer - aerosol 200ml	590920000
Seal & Bond Special Primer - aerosol 400ml	590922000

Product [SSP]

Characteristics

Seal & Bond Special Primer guarantees a better bonding on synthetic materials, powder coating, paints... Seal & Bond Special Primer combines a high elasticity with a fast drying time. After +/-10 minutes gluing is possible. Seal & Bond Special Primer is to be applied directly on the surface that needs to be glued. Because of the application of the primer the surface is ideal for bonding MS Polymers, silicones, tapes, paints...

Applications


Improving bonding of difficult materials to glue, shiny materials, bumpers, aluminum powder coated window profiles, sandwich paneling, doors, exterior rear-view mirrors, spoilers...

Use

- Shake well before use after liberating the mixing ball.
- Apply on dry and clean surface. If necessary clean with Safety Clean and/or Multifoam, and etch with Megaclean.
- Apply one thin layer.
- Let dry for 10 min. at a temperature of 20°C before applying glue, tape or paint .

Novatech International NV produces all information with the utmost care but cannot give any guarantees as to its nature, content and/or use. The company does not accept any liability for direct or indirect damage caused by the contents of the information included. All images included are for indicative purposes only. No rights may be derived from them. None of the published data may be copied, stored in an automated database and/or made public, in any form or manner, without the explicit prior written consent of Novatech International NV.

Use of Seal & Bond Special Primer on bare metal gives no added value

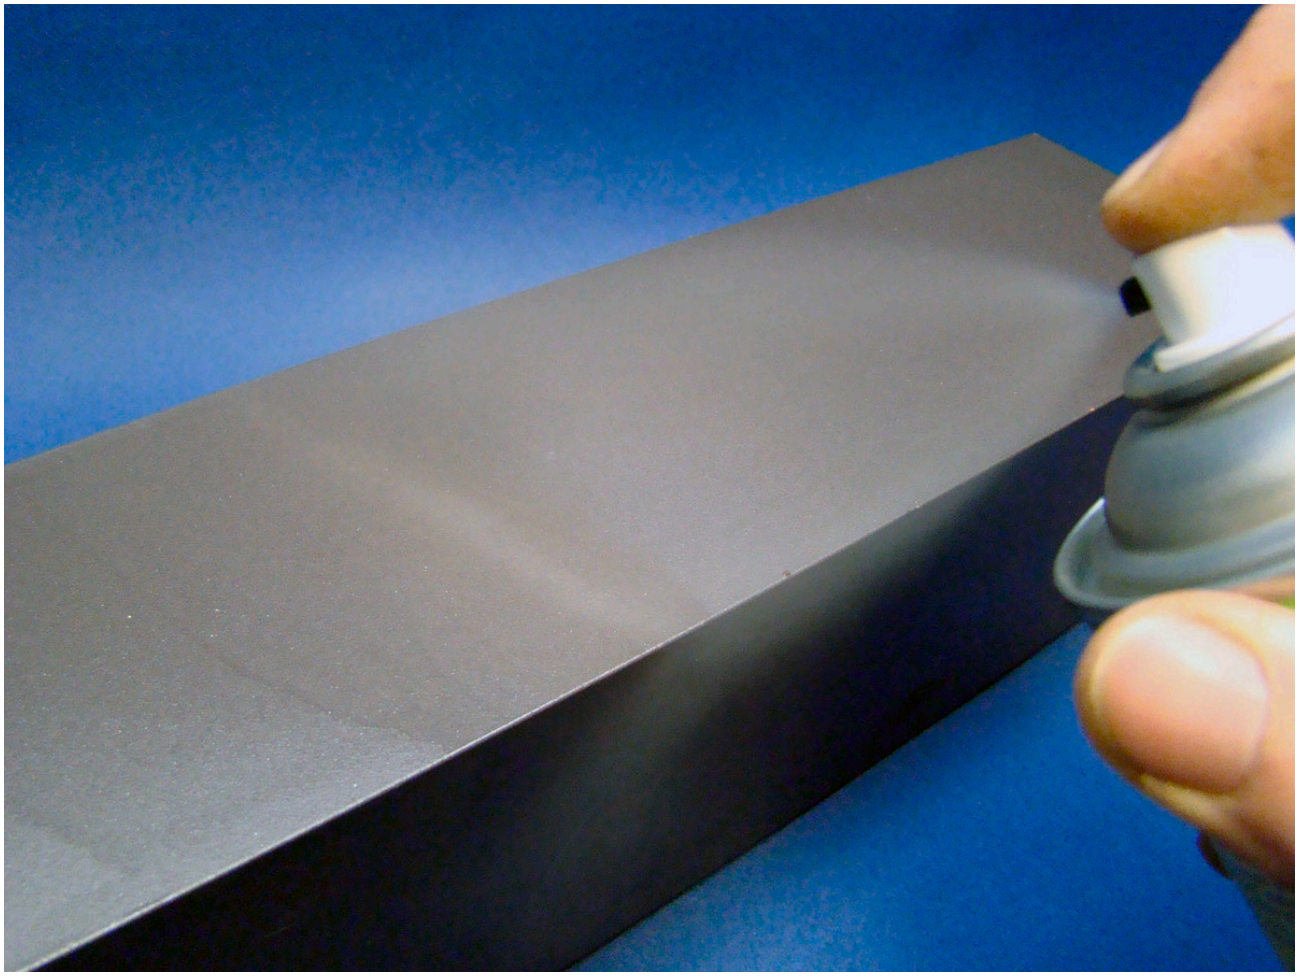

Novatech International NV produces all information with the utmost care but cannot give any guarantees as to its nature, content and/or use. The company does not accept any liability for direct or indirect damage caused by the contents of the information included. All images included are for indicative purposes only. No rights may be derived from them. None of the published data may be copied, stored in an automated database and/or made public, in any form or manner, without the explicit prior written consent of Novatech International NV.