



Lubricant H1

LUBRICANT APPROVED FOR USE IN THE FOOD INDUSTRY

- ✓ Clear, odorless and non-staining.
- ✓ High viscosity, non-sticky and antistatic.
- ✓ Temperature and water resistant.
- ✓ Does not contain silicone!



Technical Info

- NSF registration number: Category H1. Compliant with: FDA, Title 21, Section 178.3570.
- Free of: lead, animal fat and synthetic oils.
- Odour: typical.
- Operating temperature: -20°C to +110°C.
- Shelf life: 36 months, keep dry, cool and frost-proof.
- Safety measures: consult the Safety Data Sheet.

Packing

Lubricant H1 - aerosol 400ml

214601000

Product [LB1]

Characteristics

Lubricant H1 offers optimum lubrication, even under high loads, is easy to apply in hard-to-reach places and can be used in a large temperature range without changing viscosity. Lubricant H1 also protects against corrosion by forming a thin film layer, while still penetrating deep into the objects to be lubricated. Very effective with periodic and inaccessible lubrication points, also for heavy duty, inside and outside.

Applications



For food companies.

For gaskets, packages, seals, O-rings, bearings, open mechanisms, cables, conductors, couplings, sliding rods, hinges, lock mechanisms,

For installations that have to withstand harsh conditions in extreme conditions, contact with acids, alkalis, hot and cold water, steam and high pressure loads.

Use

- Shake well before use.
- Keep the aerosol can upright and spray from a distance of between 25 and 30 cm.

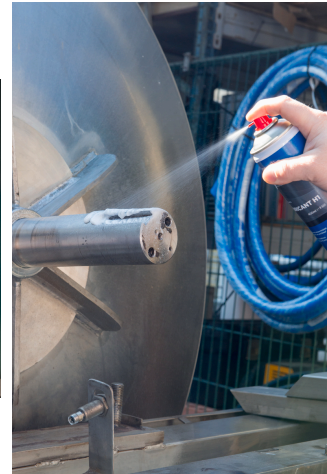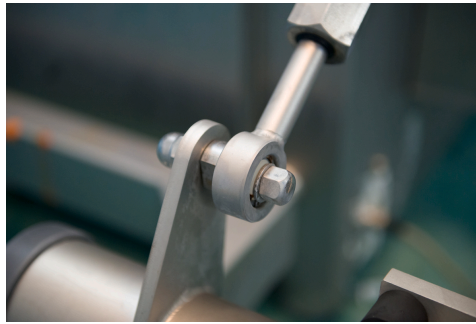

Lubricants