

# Seal & Bond Flex-Sil



THE LIQUID GASKET

- ✓ Quickly any shape and immediately water and airtight.
- ✓ Resistant to chemicals and high pressure.
- ✓ Remains flexible and stable at both high and low temperatures.
- ✓ Can be used horizontally and vertically.

## Technical Info

- Base: MEKO free silicone.
- Colour: black or red.
- Density (DIN EN ISO 2811-1): 1,11 - 1,28 g/ml.
- Skin-formation: approx. 8 min.
- Curing time: +/- 3 mm/h.
- Hardness (DIN 53505): 38 ± 6 Shore A.
- Volume shrinkage (31 DIN EN ISO 10563): ≤ 4%.
- Processing temperature: +5°C to +35°C.
- Chemical resistance: oils, greases, lubricants, diesel, gasoline, ad blue, IPA, transmission and brake fluids, antifreeze, water, steam, fuel oil, alkali, acetone, saline solutions, light acids (up to 20%), ... .
- Temperature resistance: -40°C to +250°C, shortly up to +300°C.
- Shelf life: 18 months, cool, dry and dark at +5°C to +25°C in unopened original packaging.

## Packing

Gun + nozzle for Seal & Bond Flex-Sil Presspack 202ml	221005010
Seal & Bond Flex-Sil red - cartridge 310ml	574106000
Seal & Bond Flex-Sil black - 202ml presspack	573206000
Seal & Bond Flex-Sil black - cartridge 310ml	573106000

## Product [SBF]

### Characteristics


Seal & Bond Flex-Sil is a sealant based on acetate-free silicone, with excellent adhesion on most materials. Seal & Bond Flex-Sil is very elastic and has an excellent chemical and temperature resistance. The Seal & Bond Flex-Sil presspack makes the use of a gun superfluous.

### Applications

- Sealing of machine parts.
- Insulation and moisture proofing of electrical contacts on electric motors.
- Sealing seams between sheet material.
- Prevents galvanic effect.
- Bonding of light objects on non-porous surfaces.
- Adheres to: steel, aluminum, galvanized steel, copper, brass, bronze, paintwork, glass, ceramics and various types of plastic.

## Use

For an optimal adhesion, the surfaces should be free from corrosion and grease.

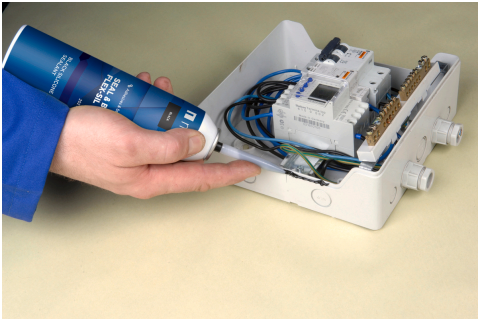

**Adhesives and sealants**